



FlowSol® E

For converting excess current into thermal energy

The RESOL FlowSol® E has been especially designed for using excess power produced by PV systems.


The measuring device reliably detects excess current and the integrated controller redirects it to a steplessly variable electric heater for heating a water store.

Thus, excess power can be stored as regenerative heat, internal consumption can be increased while decreasing conventional heating costs.

- Integrated DeltaTherm® E controller and high-efficiency pump
- Integrated electric heater of up to 3 kW, steplessly variable and grid compliant
- Retrofittable in all heating and DHW systems
- Reliable household power priority



Example

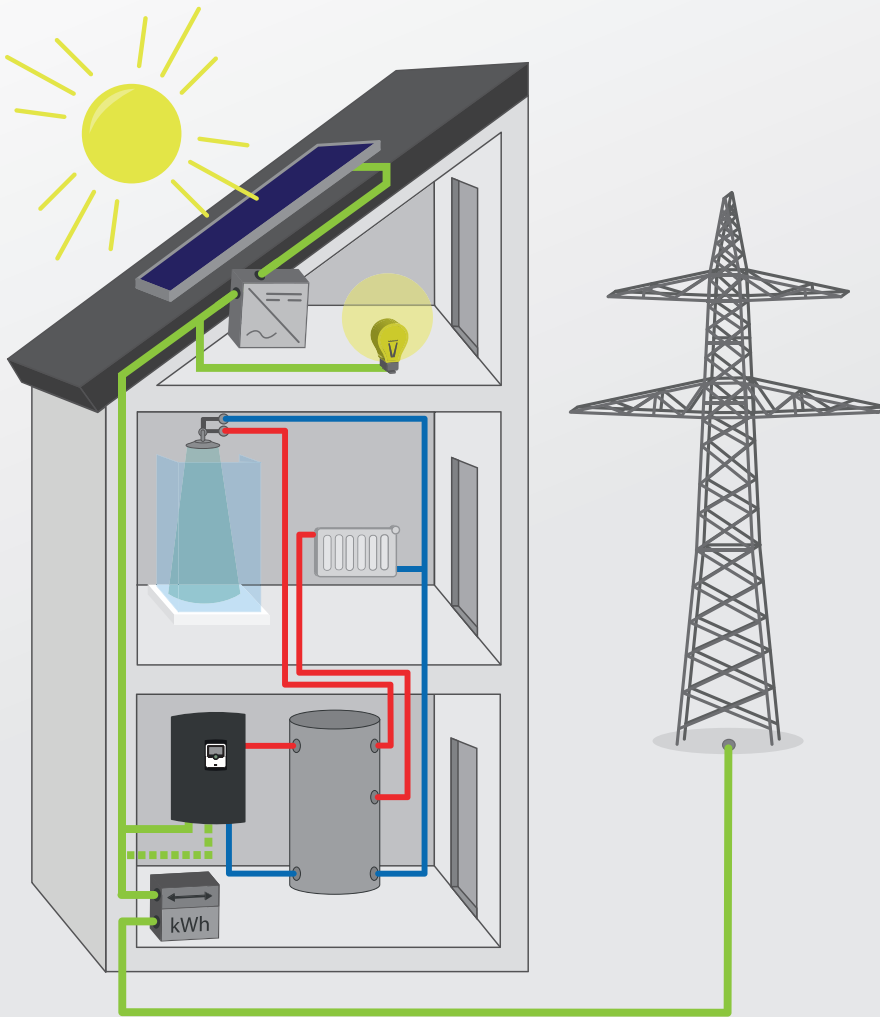


- Converts excess PV current into heat and stores it for later use
- Helps using more regenerative power for yourself and decrease heating costs
- Contains power fluctuations, observes household power priority
- Intelligent control technology for optimum store stratification

RESOL FlowSol® E – DeltaTherm® E

Electrothermal station, incl. DeltaTherm® E controller, power unit and measuring unit

Article no. (heating water): **112 199 33**

Technical data

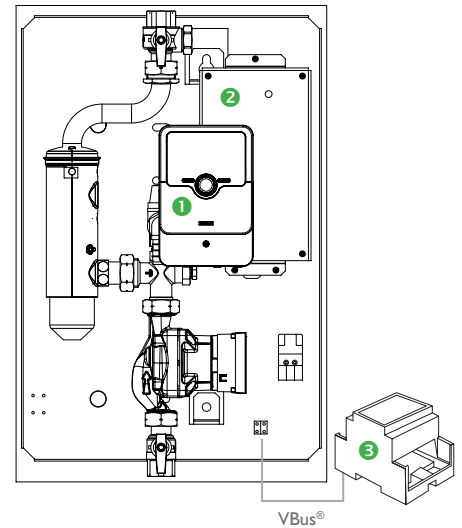

- ❶ DeltaTherm® E controller
- ❷ Power unit
- ❸ Measuring unit and current sensors

Circulating pump:

Wilo Yonos PARA 15/7.0-PWM2 (heating water)
(power consumption of the pump: 3 ... 45 W)

Power supply: 220 ... 240 V~ (50 ... 60 Hz)

Cable cross section required: 2,5 mm²

Heater: 0,8 kW/0,8 kW/1,4 kW

Nominal power/current: 0 ... 3 kW (13 A)

Safety valve:

3 bar (heating water)

Connections: Rp 3/4" IT

Maximum temperature: 95 °C

Maximum pressure:

3 bar (heating water)

Medium: heating water

Dimensions:

approx. 605 x 400 x 240 mm (with insulation)
distance centre/wall: 76 mm

Weight: 14 kg

Material:

fittings: brass

seals: EPDM

insulation: EPP foam

Technical data controller

Inputs: 4 Pt1000 temperature sensors

Outputs: 2 semiconductor relays, 1 PWM output

Switching capacity:

1 (1) A 240 V~ (semiconductor relay)

Total switching capacity: 2 A 240 V~

Power supply: 100 ... 240 V~ (50 ... 60 Hz)

Supply connection: type Y attachment

Standby: < 1 W

Mode of operation: type 1.B.C.Y action

Rated impulse voltage: 2.5 kV

Data interface: VBus®, MicroSD card slot

VBus® current supply: 60 mA

Housing: plastic, PC-ABS and PMMA

Indication/Display: full graphic display, operating control LED (Lightwheel®) and background illumination

Operation: 2 push buttons and 1 adjustment dial (Lightwheel®)

Ingress protection: IP 20/EN 60529

Protection class: I

Ambient temperature: 0 ... 40 °C

Pollution degree: 2